



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



INDEX

# GPV 2.0

## FEATURES

- **READY TO USE**
- **COMPATIBLE WITH ALL FLUIDS (UNIVERSAL VERSION ONLY)**
- **QUICK RETROFIT INSTALLATION**

## PERFORMANCE

up to  
**30 L/MIN**

FLOW-RATE

± **0,5%**

ACCURACY

**LAN/WI-FI**

CONNECTION

## EN.

The GPV 2.0 is the MCO2.0 version of the well known Piusi GPV. It includes a built in solenoid valve and an oval gear meter, everything in a single device. It is available in several versions based on the fluid you need to control.



## WI-FI CONNECTION

GPV 2.0 can be fully controlled remotely.


## ENHANCED ERGONOMICS

Designed and built to operate constantly, with no surprises.

## PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO446010	3		180X180X170		-	1
FOO446000	3		180X180X170		-	1
FOO446060	5,7		350X180X260		-	1
FOO446030	3		180X180X170		-	1
FOO446050	4,3		350X180X260		-	1
FOO44608	4,3		350X180X260		-	1
FOO446070	3		180X180X170		-	1

## CHARTS

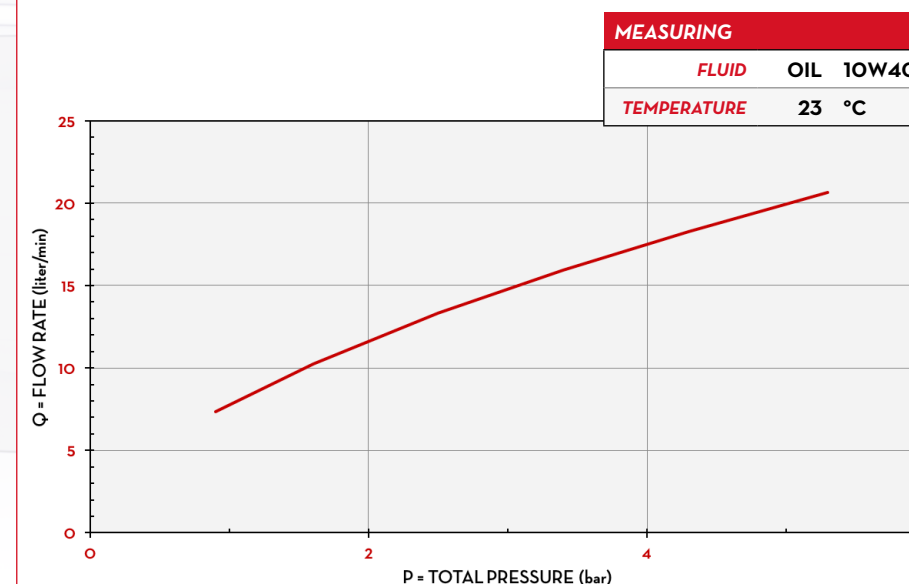

## IN THE BOX

- GPV 2.0 UNIT
- INSTRUCTION MANUAL

## MATERIALS

- BODY: METAL
- GEARS: TECHNOPOLYMER
- BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS

**i** The use of Wi-Fi technology makes the system **far easier to install and expand**, with minimal disruption of your garage activities.



## TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE		CONNECTION
			L/MIN	GPM	AC V/Hz	POWER WATT	
FOO446010	GPV 2.0 BI VALVE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446000	GPV 2.0 SINGLE VALVE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446060	GPV 2.0 SINGLE VALVE REMOTE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446030	GPV 2.0 SINGLE VALVE WINDSCREEN	W	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446070	GPV2.0 SINGLE VALVE ADBLUE	Ad	5 - 120	1,3 - 1,6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO44608	GPV2.0 SINGLE VALVE DIESEL	D	10 - 100	1,3 - 31,6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446050	UNIVERSAL VALVE AND PULSER CONTROL	ANY	-	-	100-240 V/ 50-60 HZ	25	WI-FI / LAN

**GPV 2.0**

OIL MONITORING